


ABB Motors and Generators		Technical Data Sheet				
Department/Author		Project	Location		Item name	
Our ref.		Rev/Changed by	Date of issue	Saving ident	Pages	
		A	1/16/2019	untitled.xls	1(3)	
No.	Definition	Data	Unit	Remarks		
1	Product	<i>TEFC, 3-phase, squirrel cage induction motor</i>				
2	Product code	3GBA 091 510-HDCIN			Calc. ref.	3GZH021009-14
3	Type/Frame	M2BAX 90LA 2				
4	Mounting	IM2001, B35(foot-flange)				
5	Rated output P _N	2.2	kW			
6	Service factor	1				
7	Type of duty	S1 100%				
8	Rated voltage U _N	415	VD	+10, -10 %		
9	Rated frequency f _N	50	Hz	+5, -5 %		
10	Rated speed n _N	2878	r/min			
11	Rated current I _N	4.4	A			
12						
13	Starting current I _s /I _N	7				
14	Nominal torque T _N	7.3	Nm			
15	Locked rotor torque T _S /T _N	2.5				
16	Maximum torque T _{max} /T _N	3.1				
17						
18						
Load characteristics		Load %	Current A	Efficiency %	Power factor	
19	PLL determined from residual loss	100	4.4	83.2 / IE2	0.84	
20		75	3.4	84	0.8	
21		50	2.6	82.6	0.7	
22						
23	Thermal withstand time hot	6	s			
24	Thermal withstand time cold	13	s			
25	Insulation class / Temperature class	F / B				
26	Ambient temperature	50	°C			
27	Altitude	1000 m.a.s.l.				
28	Degree of protection	IP55				
29	Cooling system	IC411 self ventilated				
30	Bearing DE/NDE	6205-2Z/C3 - 6204-2Z/C3				
31	Sound pressure level (LP dB(A) 1m)	68	dB(A)	at no-load		
32	Moment of inertia J = ¼ GD ²	0.00274	kg·m ²			
33	Position of terminal box	Top				
34	Direction of rotation	Bi-directional				
35	Weight of rotor	4	kg			
36	Total weight of motor	23	kg			
37						
38						
39						
40						
41						
42						
43						
44						
45						
Ex-motors						
46						
47						
48						
Option Variant Codes / Definition						
49						
50						
51						
52						
Remarks:						
Data based on situation 8/8/2016						

All performance values are subject to IS/IEC tolerances


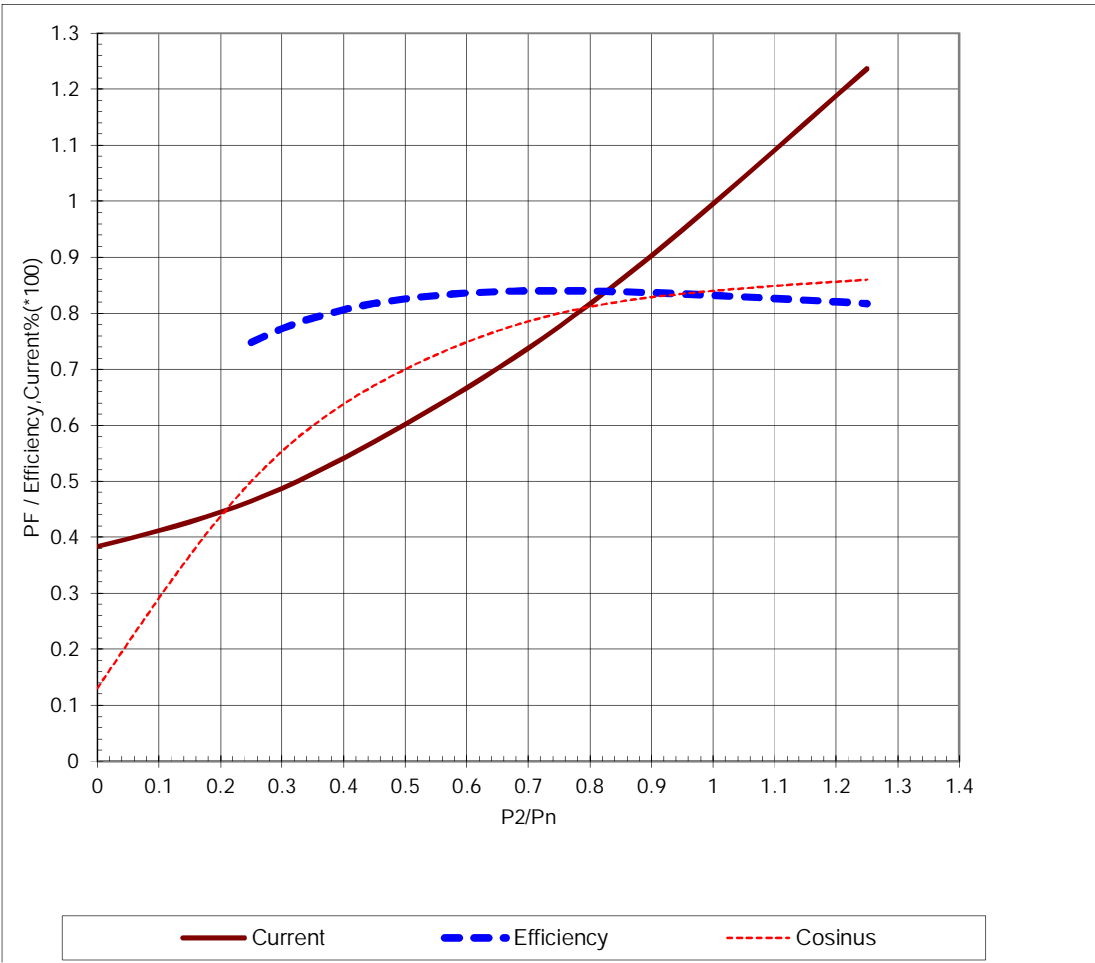
ABB Motors and Generators	Load Curves		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/16/2019	Saving ident untitled.xls
Pages 2(3)	Product TEFC, 3-phase, squirrel cage induction motor		
Type/Frame	M2BAX 90LA 2	Calc. ref.	3GZH021009-14
Product code	3GBA 091 510-HDCIN		
Rated output P _N	2.2 kW		
Type of duty	S1 100%		
Voltage (V)	415	Current I _N (A)	4.4
Frequency (Hz)	50	Speed (r/min)	2878
		Power factor at P _N	0.84
		Efficiency (%) at P _N	83.2
			
<p>Data based on situation 8/8/2016</p> <p style="text-align: center;">All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004</p>			


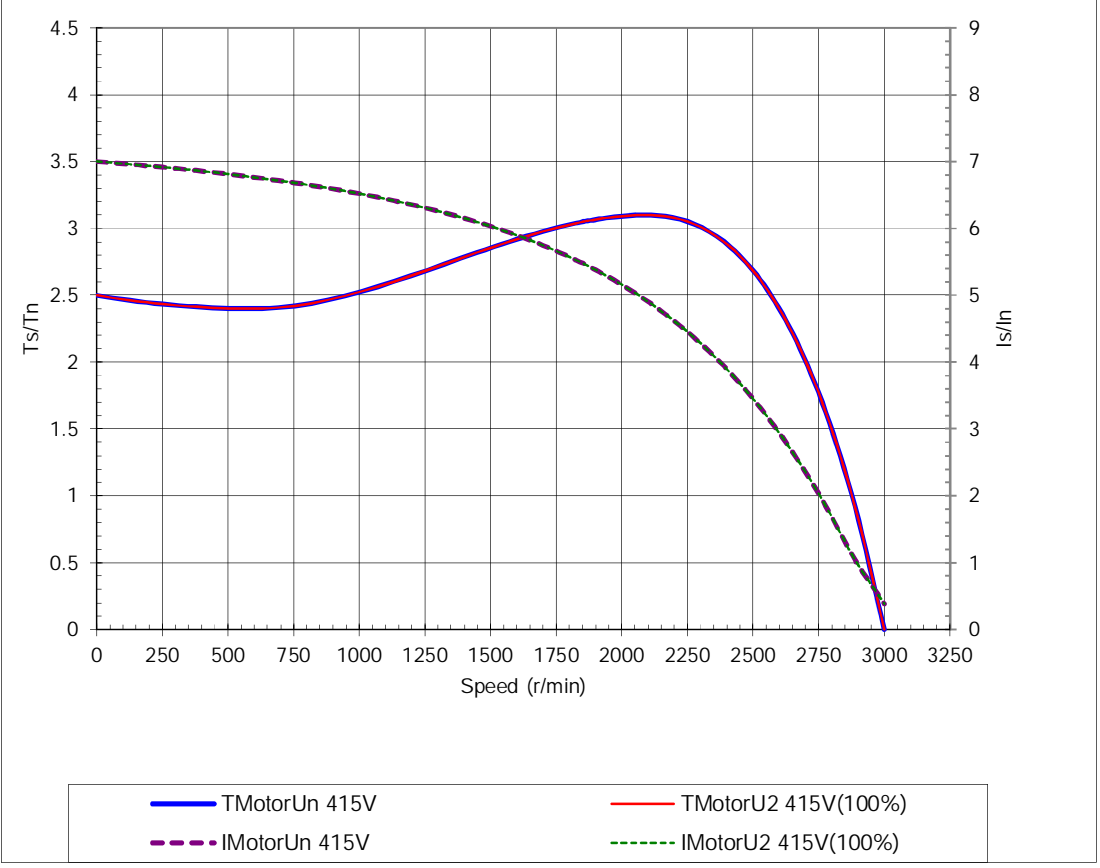

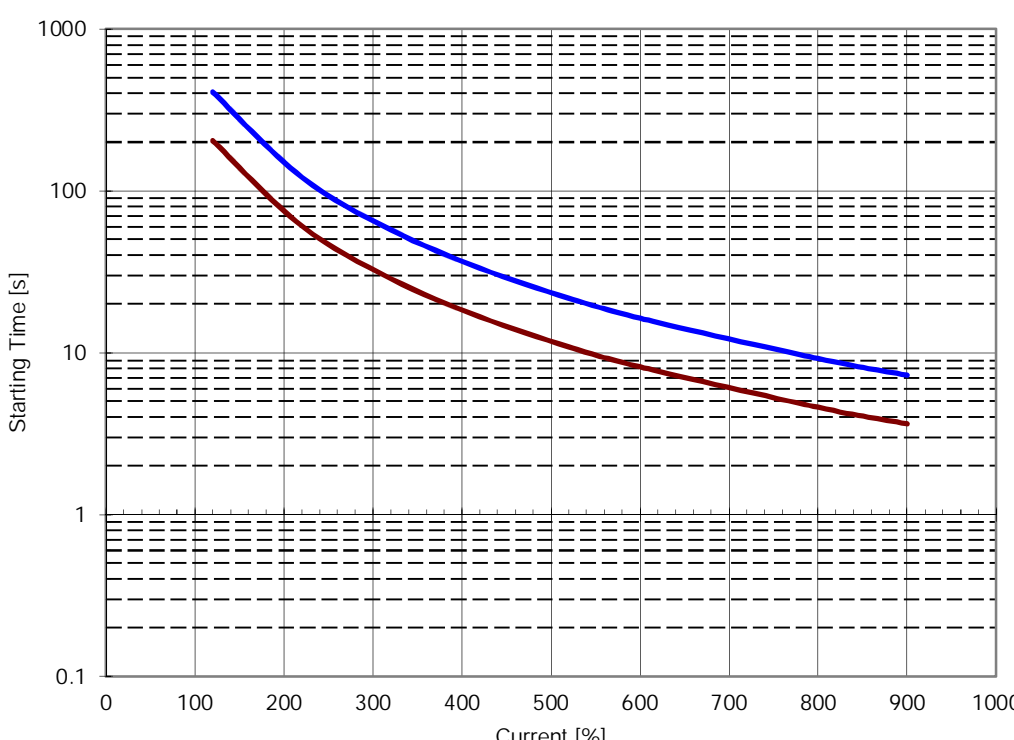
ABB Motors and Generators	Starting Curves			
	Project	Location		
Department/Author	Customer name	Customer ref.		Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/16/2019	Saving ident untitled.xls	Pages 3(3)
Type of product	TEFC, 3-phase, squirrel cage induction motor			
Type/Frame	M2BAX 90LA 2	Calc. ref.	3GZH021009-14	
Product code	3GBA 091 510-HDCIN	Frequency (Hz)	50	
Rated output P _N	2.2 kW	Rated current I _N	4.4	A
Type of duty	S1 100%			
J _{motor} (kgm ²)	0.0027	Voltage (V) 100%	415	Voltage (V) 415V(100%)
J _{load} (kgm ²)		T _{start} /T _N	2.5	T _{start} /T _N 2.5
Speed (r/min)	2878	Starting time (s)	0.1	Starting time (s)
T _N (Nm)	7.3	Speed (r/min)		Speed (r/min)
T _{load} (Nm)		I _s /I _N	7	I _s /I _N 7
		T _{max} /T _N	3.1	T _{max} /T _N 3.1
 <p>The graph plots torque (T_s/T_N) and current (I_s/I_N) against speed (r/min) for a 415V motor. The x-axis ranges from 0 to 3250 r/min. The left y-axis (T_s/T_N) ranges from 0 to 4.5, and the right y-axis (I_s/I_N) ranges from 0 to 9. Four curves are shown: T_{MotorUn} 415V (solid blue), T_{MotorU2} 415V(100%) (solid red), I_{MotorUn} 415V (dashed purple), and I_{MotorU2} 415V(100%) (dashed green). The torque curves peak at approximately 2000 r/min, while the current curves peak at approximately 2200 r/min.</p>				
Data based on situation 8/8/2016				
All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004				

ABB Motors and Generators	Thermal Withstand Curve		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/16/2019	Saving ident untitled.xls
Pages 5(3)			
Type of product	TEFC, 3-phase, squirrel cage induction motor		
Type/Frame	M2BAX 90LA 2	Calc. ref.	3GZH021009-14
Product code	3GBA 091 510-HDCIN	Frequency (Hz)	50
Rated output P _N	2.2 kW	Rated current I _N	4.4 A
Type of duty	S1 100%		
J _{motor} (kgm ²)	0.0027	Voltage (V) 100%	415
J _{load} (kgm ²)		Voltage (V)	415V(100%)
Speed (r/min)	2878	T _{start} /T _N	2.5
T _N (Nm)	7.3	Starting time (s)	0.1
T _{load} (Nm)		Speed (r/min)	
		I _s /I _N	7
		I _s /I _N	7
		T _{max} /T _n	3.1
		T _{max} /T _n	3.1



Current [%]	Starting Time [s] (Running Hot)	Starting Time [s] (Running Cold)
100	~150	~300
200	~60	~120
300	~35	~70
400	~22	~45
500	~15	~30
600	~10	~20
700	~7	~15
800	~5	~11
900	~4	~8

Data based on situation 8/8/2016

All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004