

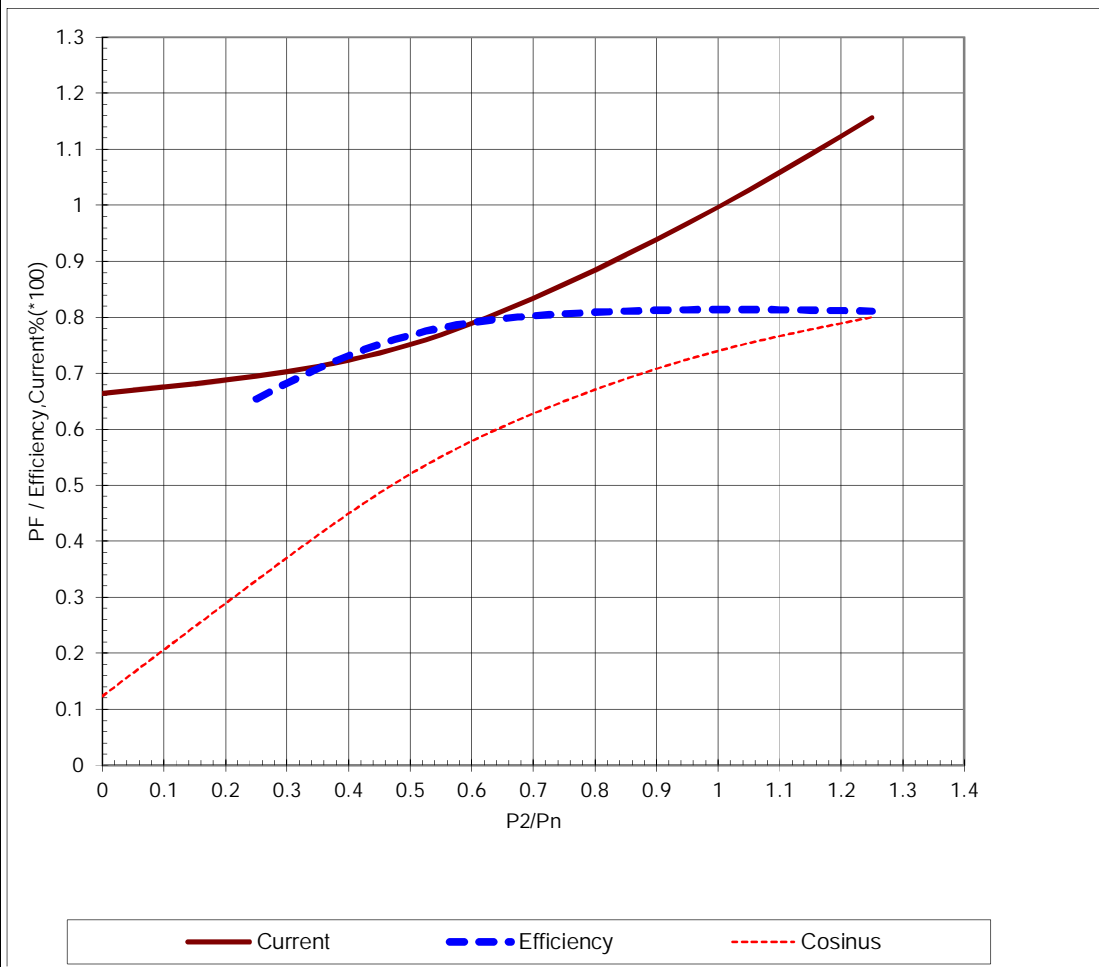


ABB Motors and Generators		Technical Data Sheet				
Department/Author		Project	Location		Item name	
Our ref.		Rev/Changed by	Date of issue	Saving ident	Pages	
		A	1/16/2019	untitled.xls	1.00001 1(3)	
No.	Definition	Data	Unit	Remarks		
1	Product	TEFC, 3-phase, squirrel cage induction motor				
2	Product code	3GBA 092 110-HSCIN			Calc. ref.	3GZH021009-15
3	Type/Frame	M2BAX 90SA 4				
4	Mounting	IM2001, B35(foot-flange)				
5	Rated output P _N	1.1	kW			
6	Service factor	1				
7	Type of duty	S1 100%				
8	Rated voltage U _N	415	VY	+10, -10 %		
9	Rated frequency f _N	50	Hz	+5, -5 %		
10	Rated speed n _N	1430	r/min			
11	Rated current I _N	2.55	A			
12						
13	Starting current I _s /I _N	6				
14	Nominal torque T _N	7.3	Nm			
15	Locked rotor torque T _S /T _N	3				
16	Maximum torque T _{max} /T _N	3.5				
17						
18						
Load characteristics		Load %	Current A	Efficiency %	Power factor	
19	PLL determined from residual loss	100	2.55	81.4 / IE2	0.74	
20		75	2.2	80.6	0.65	
21		50	1.92	76.8	0.52	
22						
23	Thermal withstand time hot	6	s			
24	Thermal withstand time cold	13	s			
25	Insulation class / Temperature class	F / B				
26	Ambient temperature	50	°C			
27	Altitude	1000	m.a.s.l.			
28	Degree of protection	IP55				
29	Cooling system	IC411 self ventilated				
30	Bearing DE/NDE	6205-2Z/C3 - 6204-2Z/C3				
31	Sound pressure level (LP dB(A) 1m)	63	dB(A)	at no-load		
32	Moment of inertia J = ¼ GD ²	0.00372	kg-m ²			
33	Position of terminal box	Top				
34	Direction of rotation	Bi-directional				
35	Weight of rotor	5	kg			
36	Total weight of motor	21	kg			
37						
38						
39						
40						
41						
42						
43						
44						
45						
Ex-motors						
46						
47						
48						
Option Variant Codes / Definition						
49						
50						
51						
52						
Remarks:						
Data based on situation 8/8/2016						

All performance values are subject to IS/IEC tolerances

ABB Motors and Generators	Load Curves		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/16/2019	Saving ident untitled.xls
Pages 2(3)	Product TEFC, 3-phase, squirrel cage induction motor		
Type/Frame	M2BAX 90SA 4	Calc. ref.	3GZH021009-15
Product code	3GBA 092 110-HSCIN		
Rated output P _N	1.1 kW		
Type of duty	S1 100%		

Voltage (V)	415	Current I _N (A)	2.55	Power factor at P _N	0.74
Frequency (Hz)	50	Speed (r/min)	1430	Efficiency (%) at P _N	81.4



Data based on situation 8/8/2016

All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004


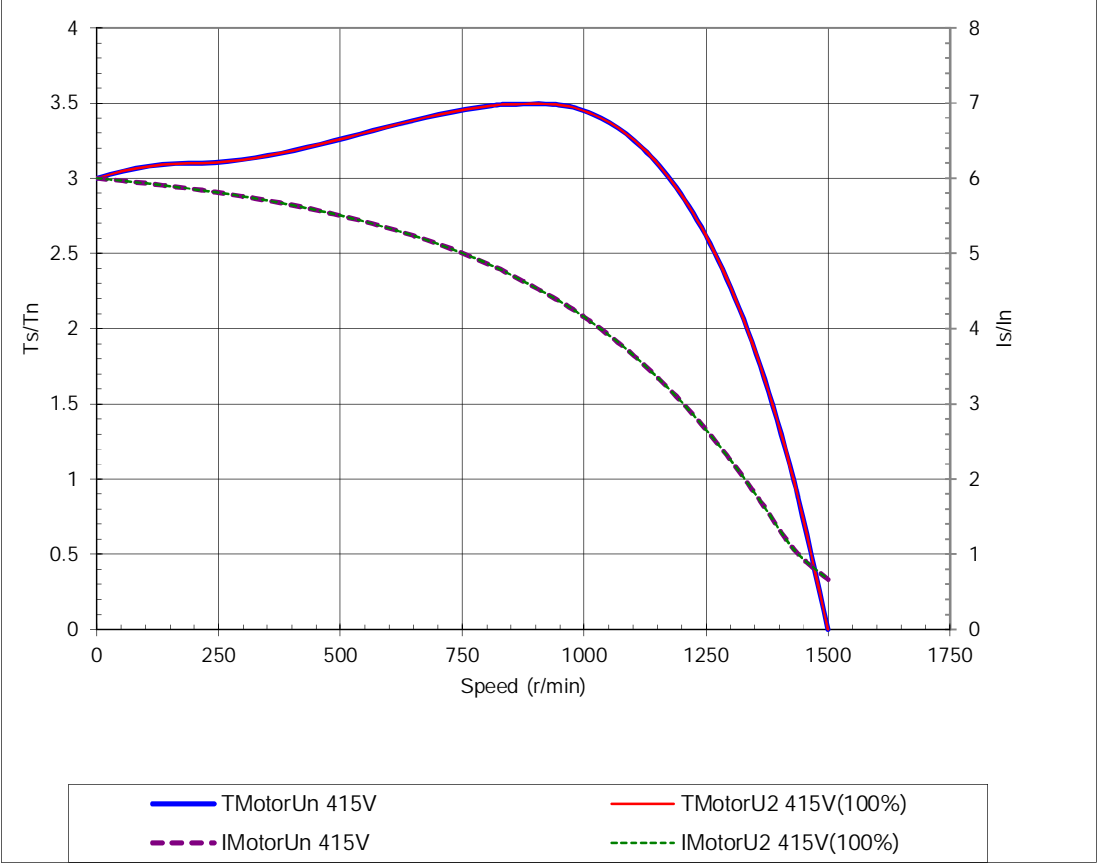

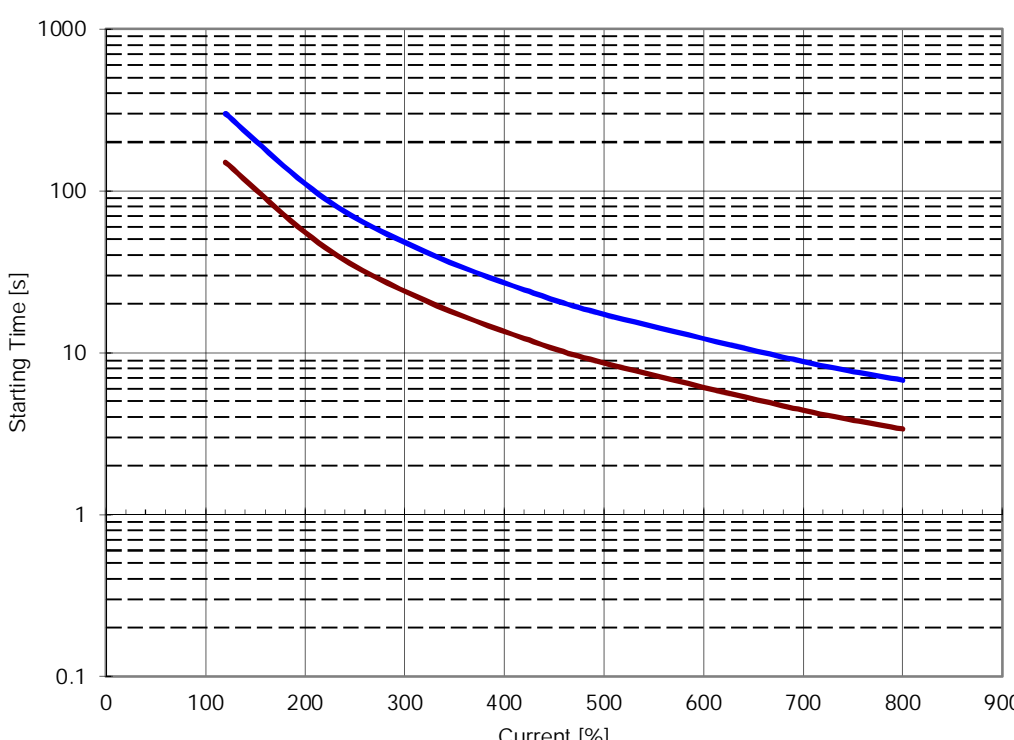
ABB Motors and Generators	Starting Curves			
	Project	Location		
Department/Author	Customer name	Customer ref.		Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/16/2019	Saving ident untitled.xls	Pages 3(3)
Type of product	TEFC, 3-phase, squirrel cage induction motor			
Type/Frame	M2BAX 90SA 4	Calc. ref.	3GZH021009-15	
Product code	3GBA 092 110-HSCIN	Frequency (Hz)	50	
Rated output P _N	1.1 kW	Rated current I _N	2.55	A
Type of duty	S1 100%			
J _{motor} (kgm ²)	0.0037	Voltage (V) 100%	415	Voltage (V) 415V(100%)
J _{load} (kgm ²)		T _{start} /T _N	3	T _{start} /T _N 3
Speed (r/min)	1430	Starting time (s)		Starting time (s)
T _N (Nm)	7.3	Speed (r/min)		Speed (r/min)
T _{load} (Nm)		I _s /I _n	6	I _s /I _n 6
		T _{max} /T _n	3.5	T _{max} /T _n 3.5
				
Data based on situation 8/8/2016				
All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004				

ABB Motors and Generators	Thermal Withstand Curve		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/16/2019	Saving ident untitled.xls
Pages 5(3)			
Type of product	TEFC, 3-phase, squirrel cage induction motor		
Type/Frame	M2BAX 90SA 4	Calc. ref.	3GZH021009-15
Product code	3GBA 092 110-HSCIN	Frequency (Hz)	50
Rated output P _N	1.1 kW	Rated current I _N	2.55 A
Type of duty	S1 100%		
J _{motor} (kgm ²)	0.0037	Voltage (V) 100%	415
J _{load} (kgm ²)		T _{start} /T _N	3
Speed (r/min)	1430	Starting time (s)	
T _N (Nm)	7.3	Speed (r/min)	
T _{load} (Nm)		I _s /I _N	6
		T _{max} /T _n	3.5
		Voltage (V)	415V(100%)
		T _{start} /T _N	3
		Starting time (s)	
		Speed (r/min)	
		I _s /I _N	6
		T _{max} /T _n	3.5



Current [%]	Starting Time [s] - Running Hot	Starting Time [s] - Running Cold
100	150	250
200	60	100
300	30	50
400	18	30
500	12	20
600	8	15
700	6	11
800	4	8

— Running Hot — Running Cold

Data based on situation 8/8/2016

All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004