


ABB Motors and Generators		Technical Data Sheet				
Project		Location				
Department/Author		Customer name		Customer ref.		
Our ref.		Rev/Changed by A		Date of issue 1/18/2019		
		Saving ident untitled.xls		Item name 1.00001		
				Pages 1(3)		
No.	Definition	Data	Unit	Remarks		
1	Product	TEFC, 3-phase, squirrel cage induction motor				
2	Product code	3GBA 102 520-HDDIN		Calc. ref.	3GZH021010-2	
3	Type/Frame	M2BAX 100LB 4				
4	Mounting	IM2001, B35(foot-flange)				
5	Rated output P _N	2.2	kW			
6	Service factor	1				
7	Type of duty	S1 100%				
8	Rated voltage U _N	415	VD	+10, -10 %		
9	Rated frequency f _N	50	Hz	+5, -5 %		
10	Rated speed n _N	1445	r/min			
11	Rated current I _N	4.8	A			
12						
13	Starting current I _s /I _N	7				
14	Nominal torque T _N	14.5	Nm			
15	Locked rotor torque T _S /T _N	2.9				
16	Maximum torque T _{max} /T _N	3.7				
17						
18						
Load characteristics		Load %	Current A	Efficiency %	Power factor	
19	PLL determined from residual loss	100	4.8	86.7 / IE3	0.74	
20		75	4	86.9	0.66	
21		50	3.4	85.1	0.53	
22						
23	Thermal withstand time hot	7	s			
24	Thermal withstand time cold	13	s			
25	Insulation class / Temperature class	F / B				
26	Ambient temperature	50	°C			
27	Altitude	1000 m.a.s.l.				
28	Degree of protection	IP55				
29	Cooling system	IC411 self ventilated				
30	Bearing DE/NDE	6206-2Z/C3 - 6205-2Z/C3				
31	Sound pressure level (LP dB(A) 1m)	70	dB(A)	at no-load		
32	Moment of inertia J = ¼ GD ²	0.00919	kg·m ²			
33	Position of terminal box	Top				
34	Direction of rotation	Bi-directional				
35	Weight of rotor	8	kg			
36	Total weight of motor	34	kg			
37						
38						
39						
40						
41						
42						
43						
44						
45						
Ex-motors						
46						
47						
48						
Option Variant Codes / Definition						
49						
50						
51						
52						
Remarks:						
Data based on situation 12/21/2015						

All performance values are subject to IS/IEC tolerances


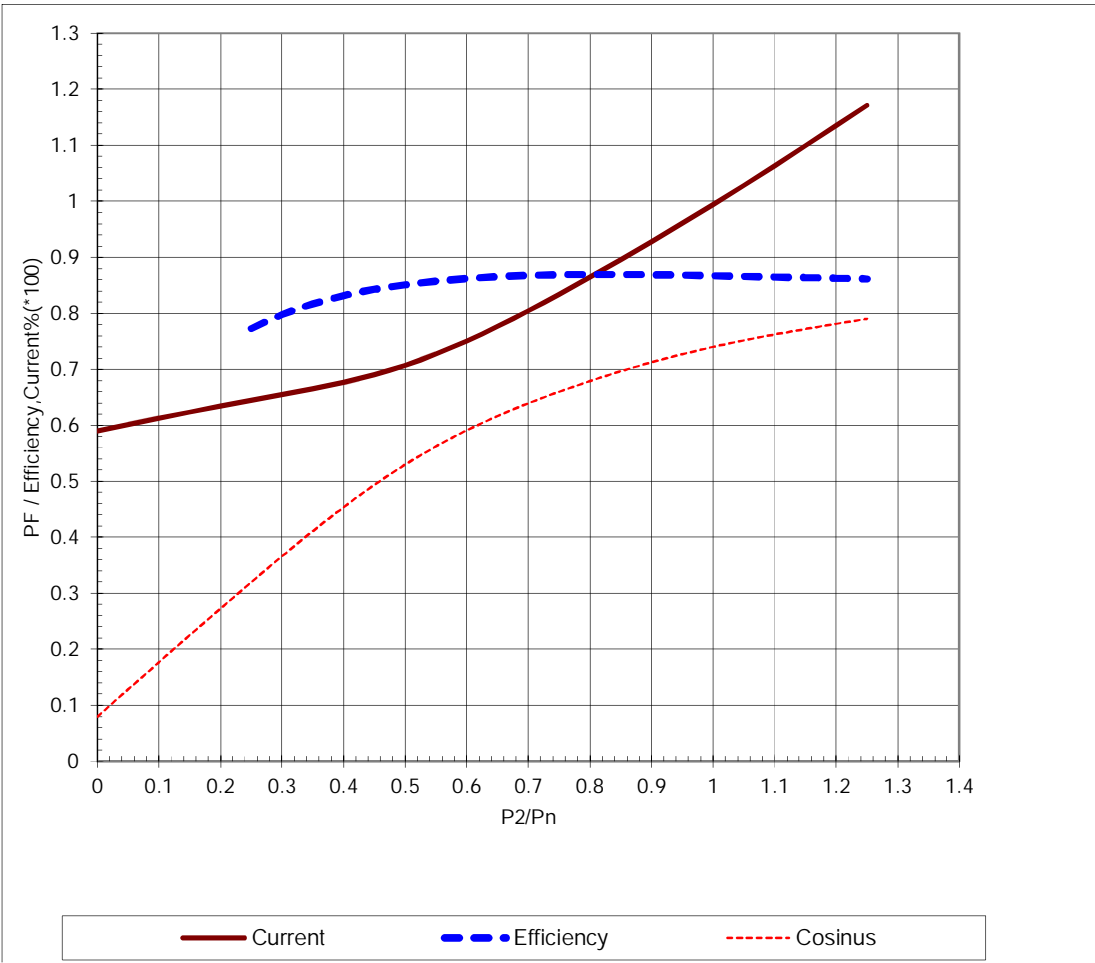
ABB Motors and Generators	Load Curves		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/18/2019	Saving ident untitled.xls
Pages 2(3)	Product TEFC, 3-phase, squirrel cage induction motor		
Type/Frame	M2BAX 100LB 4	Calc. ref.	3GZH021010-2
Product code	3GBA 102 520-HDDIN		
Rated output P _N	2.2	kW	
Type of duty	S1 100%		
Voltage (V)	415	Current I _N (A)	4.8
Frequency (Hz)	50	Speed (r/min)	1445
		Power factor at P _N	0.74
		Efficiency (%) at P _N	86.7
			
<p>Data based on situation 12/21/2015</p> <p>All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004</p>			


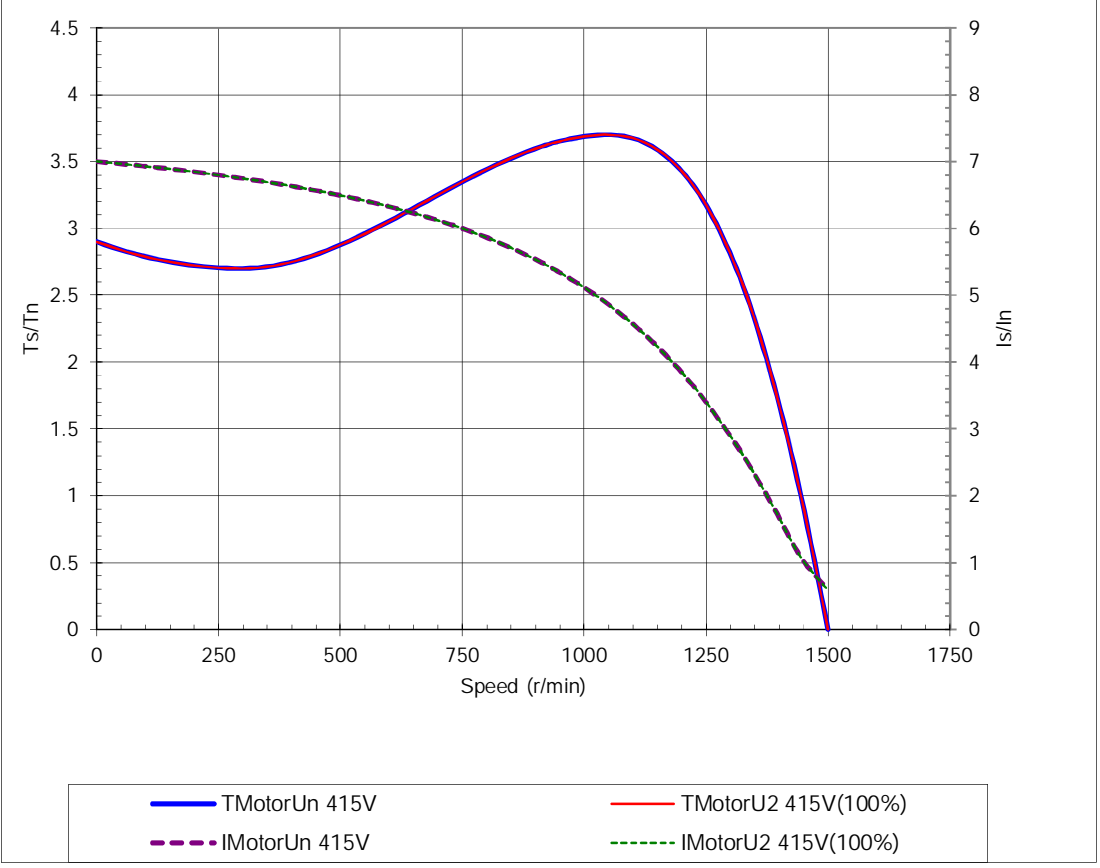

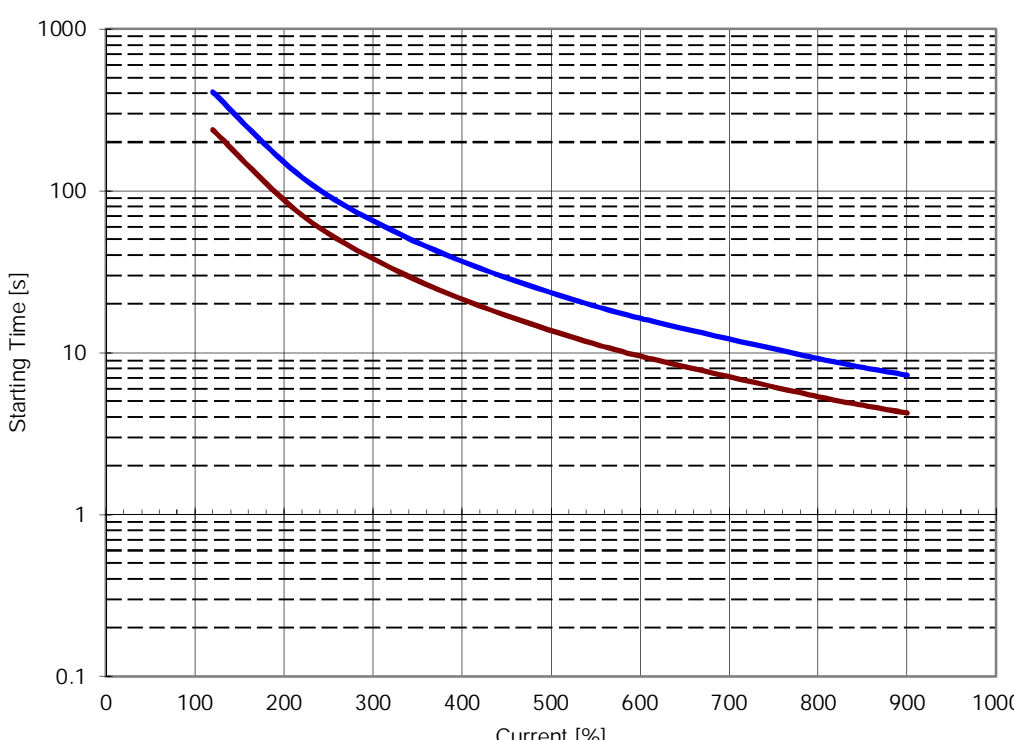
ABB Motors and Generators	Starting Curves			
	Project	Location		
Department/Author	Customer name	Customer ref.		Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/18/2019	Saving ident untitled.xls	Pages 3(3)
Type of product	TEFC, 3-phase, squirrel cage induction motor			
Type/Frame	M2BAX 100LB 4	Calc. ref.	3GZH021010-2	
Product code	3GBA 102 520-HDDIN	Frequency (Hz)	50	
Rated output P _N	2.2 kW	Rated current I _N	4.8	A
Type of duty	S1 100%			
J _{motor} (kgm ²)	0.0092	Voltage (V) 100%	415	Voltage (V) 415V(100%)
J _{load} (kgm ²)		T _{start} /T _N	2.9	T _{start} /T _N 2.9
Speed (r/min)	1445	Starting time (s)		Starting time (s)
T _N (Nm)	14.5	Speed (r/min)		Speed (r/min) 939
T _{load} (Nm)		I _s /I _N	7	I _s /I _N 7
		T _{max} /T _N	3.7	T _{max} /T _N 3.7
				
Data based on situation 12/21/2015				
All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004				

ABB Motors and Generators	Thermal Withstand Curve			
	Project	Location		
Department/Author	Customer name	Customer ref.		Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/18/2019	Saving ident untitled.xls	Pages 5(3)
Type of product	TEFC, 3-phase, squirrel cage induction motor			
Type/Frame	M2BAX 100LB 4	Calc. ref.	3GZH021010-2	
Product code	3GBA 102 520-HDDIN	Frequency (Hz)	50	
Rated output P _N	2.2 kW	Rated current I _N	4.8	A
Type of duty	S1 100%			
J _{motor} (kgm ²)	0.0092	Voltage (V) 100%	415	Voltage (V) 415V(100%)
J _{load} (kgm ²)		T _{start} /T _N	2.9	T _{start} /T _N 2.9
Speed (r/min)	1445	Starting time (s)		Starting time (s)
T _N (Nm)	14.5	Speed (r/min)		Speed (r/min) 939
T _{load} (Nm)		I _s /I _N	7	I _s /I _N 7
		T _{max} /T _n	3.7	T _{max} /T _n 3.7



Current [%]	Starting Time [s] (Running Cold)	Starting Time [s] (Running Hot)
100	~300	~200
200	~100	~70
300	~60	~45
400	~40	~30
500	~30	~22
600	~22	~16
700	~16	~12
800	~12	~9
900	~8	~6

Data based on situation 12/21/2015
All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004