

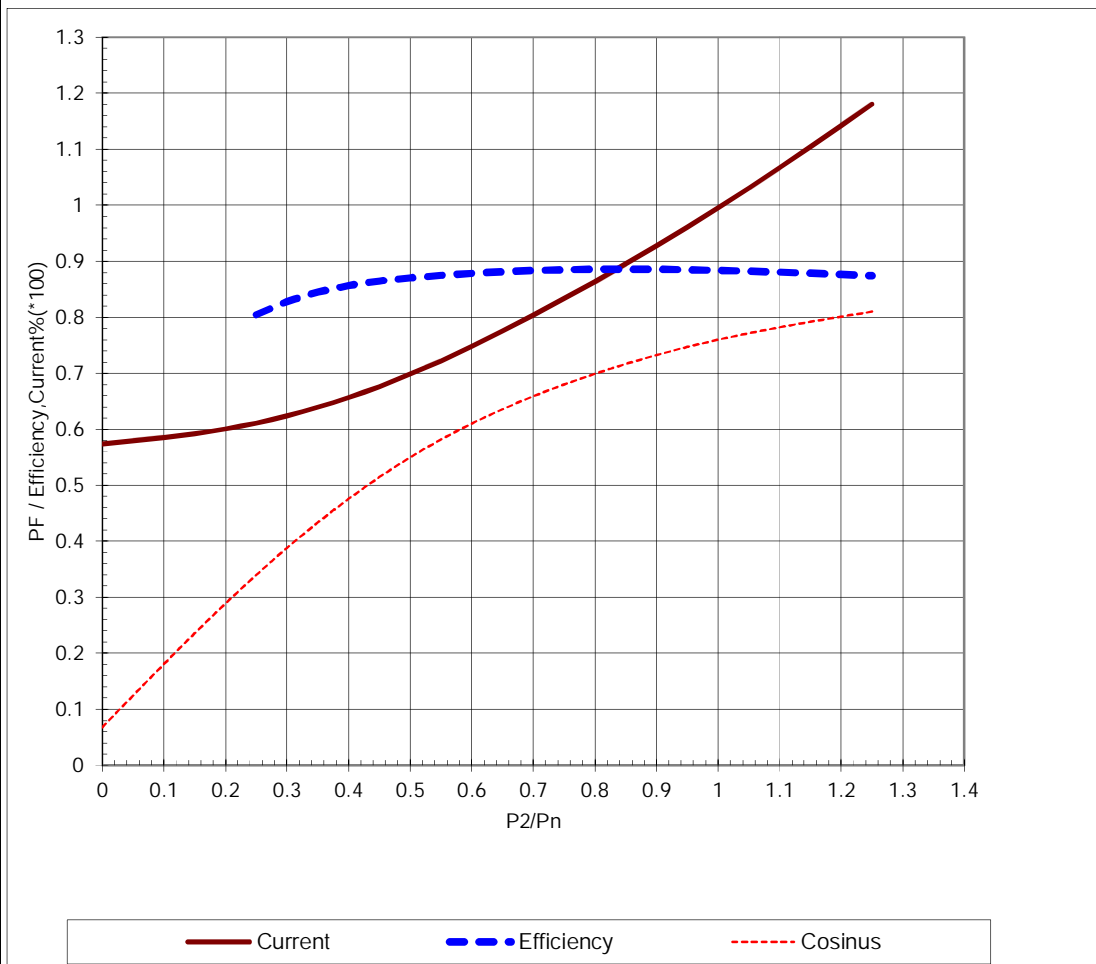


ABB Motors and Generators		Technical Data Sheet				
Department/Author		Project	Location		Item name	
Our ref.		Rev/Changed by	Date of issue	Saving ident	Pages	
		A	1/18/2019	untitled.xls	1(3)	
No.	Definition	Data	Unit	Remarks		
1	Product	TEFC, 3-phase, squirrel cage induction motor				
2	Product code	3GBA 112 410-HDDIN		Calc. ref.	3GZH021011-1	
3	Type/Frame	M2BAX 112MLA 4				
4	Mounting	IM2001, B35(foot-flange)				
5	Rated output P _N	3.7	kW			
6	Service factor	1				
7	Type of duty	S1 100%				
8	Rated voltage U _N	415	VD	+10, -10 %		
9	Rated frequency f _N	50	Hz	+5, -5 %		
10	Rated speed n _N	1450	r/min			
11	Rated current I _N	7.7	A			
12						
13	Starting current I _s /I _N	7.5				
14	Nominal torque T _N	24.4	Nm			
15	Locked rotor torque T _S /T _N	3.3				
16	Maximum torque T _{max} /T _N	3.9				
17						
18						
Load characteristics		Load %	Current A	Efficiency %	Power factor	
19	PLL determined from residual loss	100	7.7	88.4 / IE3	0.76	
20		75	6.4	88.5	0.68	
21		50	5.4	87	0.55	
22						
23	Thermal withstand time hot	7	s			
24	Thermal withstand time cold	13	s			
25	Insulation class / Temperature class	F / B				
26	Ambient temperature	50	°C			
27	Altitude	1000 m.a.s.l.				
28	Degree of protection	IP55				
29	Cooling system	IC411 self ventilated				
30	Bearing DE/NDE	6206-2Z/C3 - 6205-2Z/C3				
31	Sound pressure level (LP dB(A) 1m)	69	dB(A)	at no-load		
32	Moment of inertia J = ¼ GD ²	0.01542	kg·m ²			
33	Position of terminal box	Top				
34	Direction of rotation	Bi-directional				
35	Weight of rotor	13	kg			
36	Total weight of motor	50	kg			
37						
38						
39						
40						
41						
42						
43						
44						
45						
Ex-motors						
46						
47						
48						
Option Variant Codes / Definition						
49						
50						
51						
52						
Remarks:						
Data based on situation 12/21/2015						

All performance values are subject to IS/IEC tolerances

ABB Motors and Generators	Load Curves		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/18/2019	Saving ident untitled.xls
Pages 2(3)	Product TEFC, 3-phase, squirrel cage induction motor		
Type/Frame	M2BAX 112MLA 4	Calc. ref.	3GZH021011-1
Product code	3GBA 112 410-HDDIN		
Rated output P _N	3.7 kW		
Type of duty	S1 100%		

Voltage (V)	415	Current I _N (A)	7.7	Power factor at P _N	0.76
Frequency (Hz)	50	Speed (r/min)	1450	Efficiency (%) at P _N	88.4



Data based on situation 12/21/2015

All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004


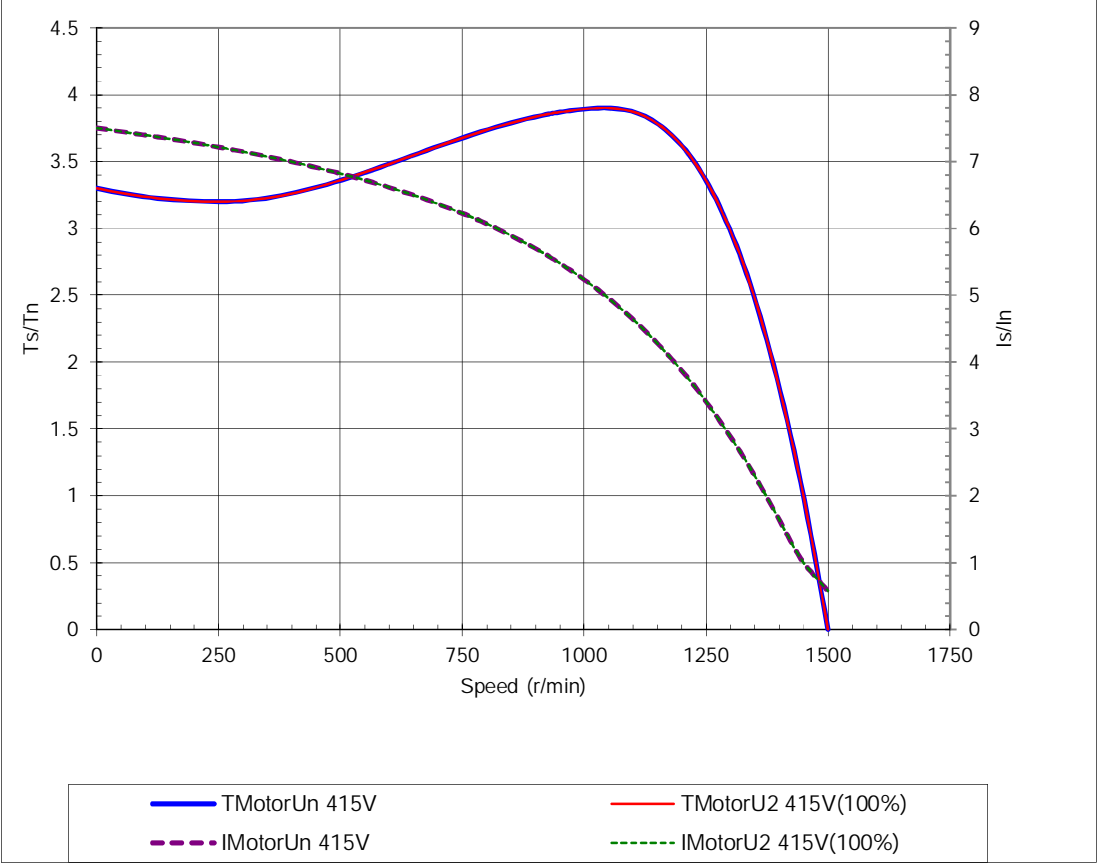

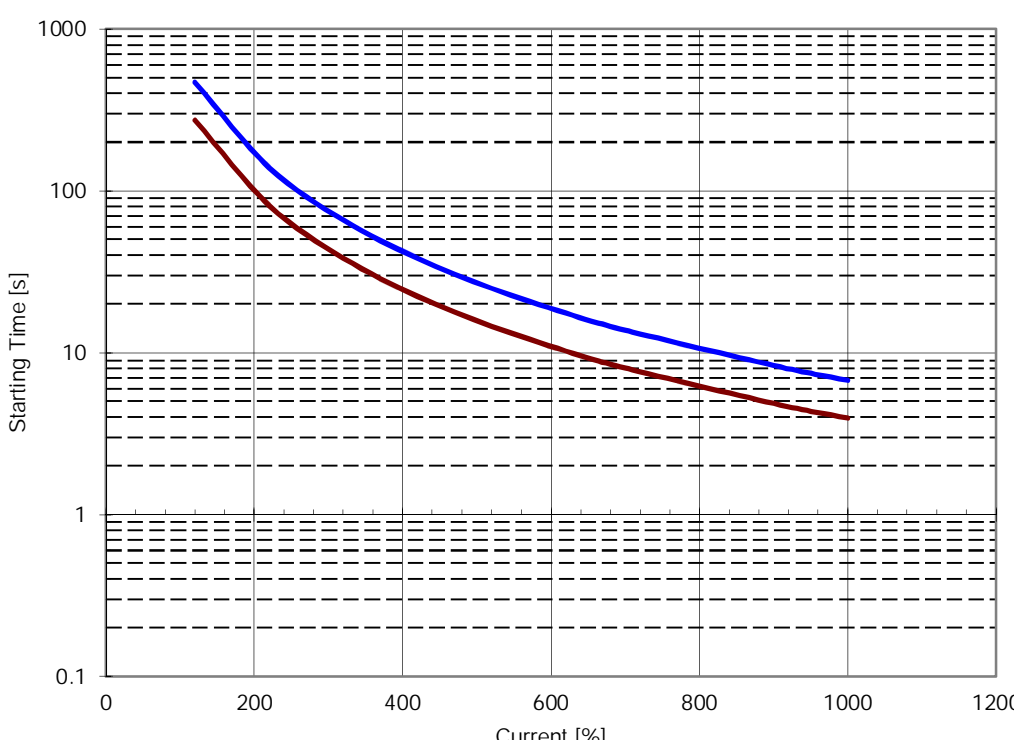
ABB Motors and Generators	Starting Curves			
	Project	Location		
Department/Author	Customer name	Customer ref.		Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/18/2019	Saving ident untitled.xls	Pages 3(3)
Type of product	TEFC, 3-phase, squirrel cage induction motor			
Type/Frame	M2BAX 112MLA 4	Calc. ref.	3GZH021011-1	
Product code	3GBA 112 410-HDDIN	Frequency (Hz)	50	
Rated output P _N	3.7 kW	Rated current I _N	7.7	A
Type of duty	S1 100%			
J _{motor} (kgm ²)	0.0154	Voltage (V) 100%	415	Voltage (V) 415V(100%)
J _{load} (kgm ²)		T _{start} /T _N	3.3	T _{start} /T _N 3.3
Speed (r/min)	1450	Starting time (s)		Starting time (s)
T _N (Nm)	24.4	Speed (r/min)		Speed (r/min) 939
T _{load} (Nm)		I _s /I _N	7.5	I _s /I _N 7.5
		T _{max} /T _N	3.9	T _{max} /T _N 3.9
 <p>The graph plots torque (T_s/T_N) and current (I_s/I_N) against speed (r/min). The x-axis ranges from 0 to 1750 r/min. The left y-axis (T_s/T_N) ranges from 0 to 4.5, and the right y-axis (I_s/I_N) ranges from 0 to 9. Four curves are shown: T_{MotorUn} 415V (solid blue), T_{MotorU2} 415V(100%) (solid red), I_{MotorUn} 415V (dashed purple), and I_{MotorU2} 415V(100%) (dashed green). The torque curves peak at approximately 1000 r/min, while the current curves peak at approximately 1000 r/min and then drop sharply towards 1500 r/min.</p>				
Data based on situation 12/21/2015				
All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004				

ABB Motors and Generators	Thermal Withstand Curve		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/18/2019	Saving ident untitled.xls
Pages 5(3)	Type of product TEFC, 3-phase, squirrel cage induction motor Type/Frame M2BAX 112MLA 4 Calc. ref. 3GZH021011-1 Product code 3GBA 112 410-HDDIN Frequency (Hz) 50 Rated output P _N 3.7 kW Rated current I _N 7.7 A Type of duty S1 100%		
J _{motor} (kgm ²) 0.0154	Voltage (V) 100% 415	Voltage (V) 415V(100%)	
J _{load} (kgm ²)	T _{start} /T _N 3.3	T _{start} /T _N 3.3	
Speed (r/min) 1450	Starting time (s)	Starting time (s)	
T _N (Nm) 24.4	Speed (r/min)	Speed (r/min) 939	
T _{load} (Nm)	I _s /I _N 7.5	I _s /I _N 7.5	
	T _{max} /T _N 3.9	T _{max} /T _N 3.9	



Current [%]	Starting Time [s] - Running Hot	Starting Time [s] - Running Cold
150	200	400
200	100	250
400	30	100
600	15	50
800	8	30
1000	4	15

Data based on situation 12/21/2015
All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004