

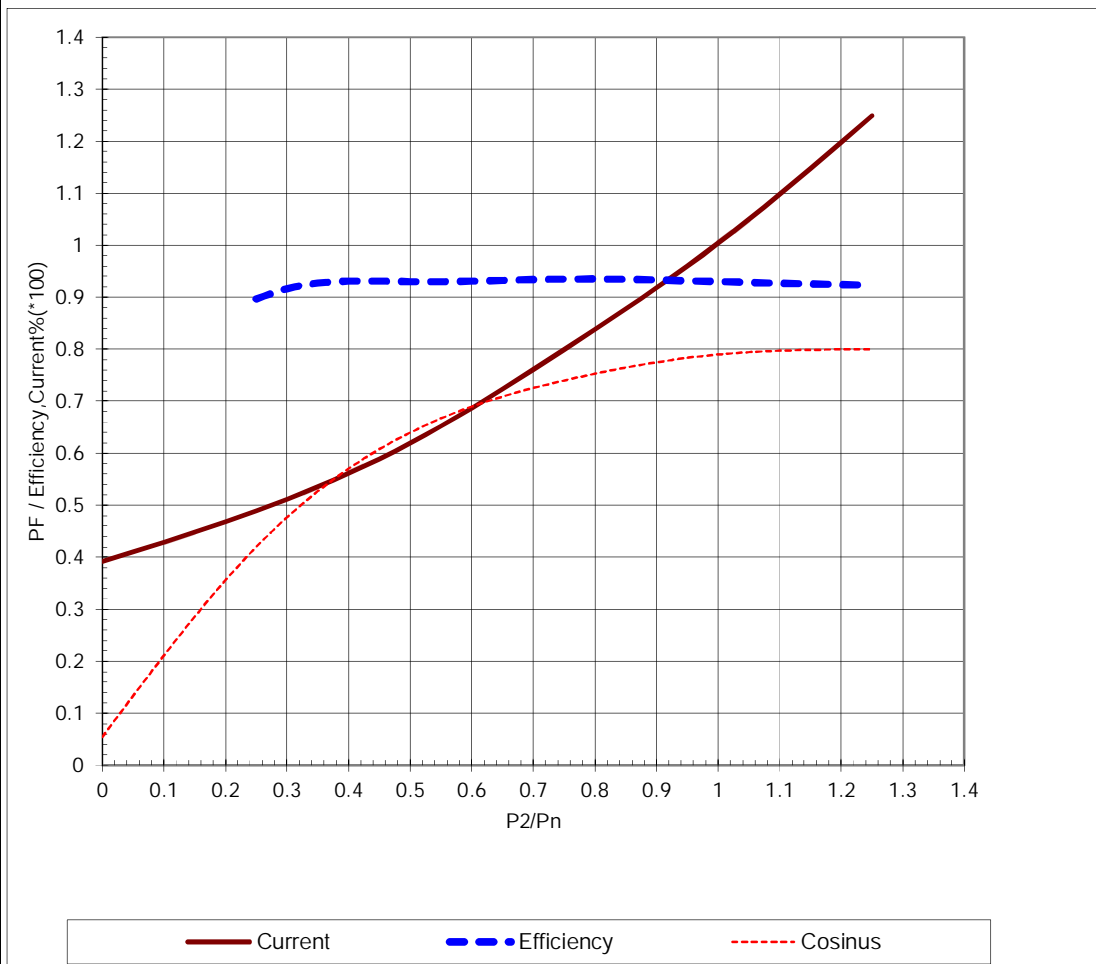


ABB Motors and Generators		Technical Data Sheet				
Department/Author		Project	Location		Item name	
Our ref.		Rev/Changed by	Date of issue	Saving ident	Pages	
		A	1/18/2019	untitled.xls	1(3)	
No.	Definition	Data	Unit	Remarks		
1	Product	<i>TEFC, 3-phase, squirrel cage induction motor</i>				
2	Product code	3GBA 182 420-HDDIN		Calc. ref.	3GZH021018-17	
3	Type/Frame	M2BAX 180MLB 4				
4	Mounting	IM2001, B35(foot-flange)				
5	Rated output P _N	22	kW			
6	Service factor	1				
7	Type of duty	S1 100%				
8	Rated voltage U _N	415	VD	+10, -10 %		
9	Rated frequency f _N	50	Hz	+5, -5 %		
10	Rated speed n _N	1475	r/min			
11	Rated current I _N	41.5	A			
12						
13	Starting current I _s /I _N	7.5				
14	Nominal torque T _N	142	Nm			
15	Locked rotor torque T _S /T _N	2.9				
16	Maximum torque T _{max} /T _N	3.5				
17						
18						
Load characteristics		Load %	Current A	Efficiency %	Power factor	
19	PLL determined from residual loss	100	41.5	93.0 / IE3	0.79	
20		75	33.2	93.5	0.74	
21		50	25.7	93	0.64	
22						
23	Thermal withstand time hot	11	s			
24	Thermal withstand time cold	17	s			
25	Insulation class / Temperature class	F / B				
26	Ambient temperature	50	°C			
27	Altitude	1000 m.a.s.l.				
28	Degree of protection	IP55				
29	Cooling system	IC411 self ventilated				
30	Bearing DE/NDE	6310-2Z/C3 - 6209-2Z/C3				
31	Sound pressure level (LP dB(A) 1m)	72	dB(A)	at no-load		
32	Moment of inertia J = ¼ GD ²	0.243	kg·m ²			
33	Position of terminal box	Top				
34	Direction of rotation	Bi-directional				
35	Weight of rotor	61	kg			
36	Total weight of motor	205	kg			
37						
38						
39						
40						
41						
42						
43						
44						
45						
Ex-motors						
46						
47						
48						
Option Variant Codes / Definition						
49						
50						
51						
52						
Remarks:						
Data based on situation 9/18/2015						

All performance values are subject to IS/IEC tolerances

ABB Motors and Generators	Load Curves		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/18/2019	Saving ident untitled.xls
Pages 2(3)	Product TEFC, 3-phase, squirrel cage induction motor		
Type/Frame	M2BAX 180MLB 4	Calc. ref.	3GZH021018-17
Product code	3GBA 182 420-HDDIN		
Rated output P _N	22 kW		
Type of duty	S1 100%		

Voltage (V)	415	Current I _N (A)	41.5	Power factor at P _N	0.79
Frequency (Hz)	50	Speed (r/min)	1475	Efficiency (%) at P _N	93



Data based on situation 9/18/2015

All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004


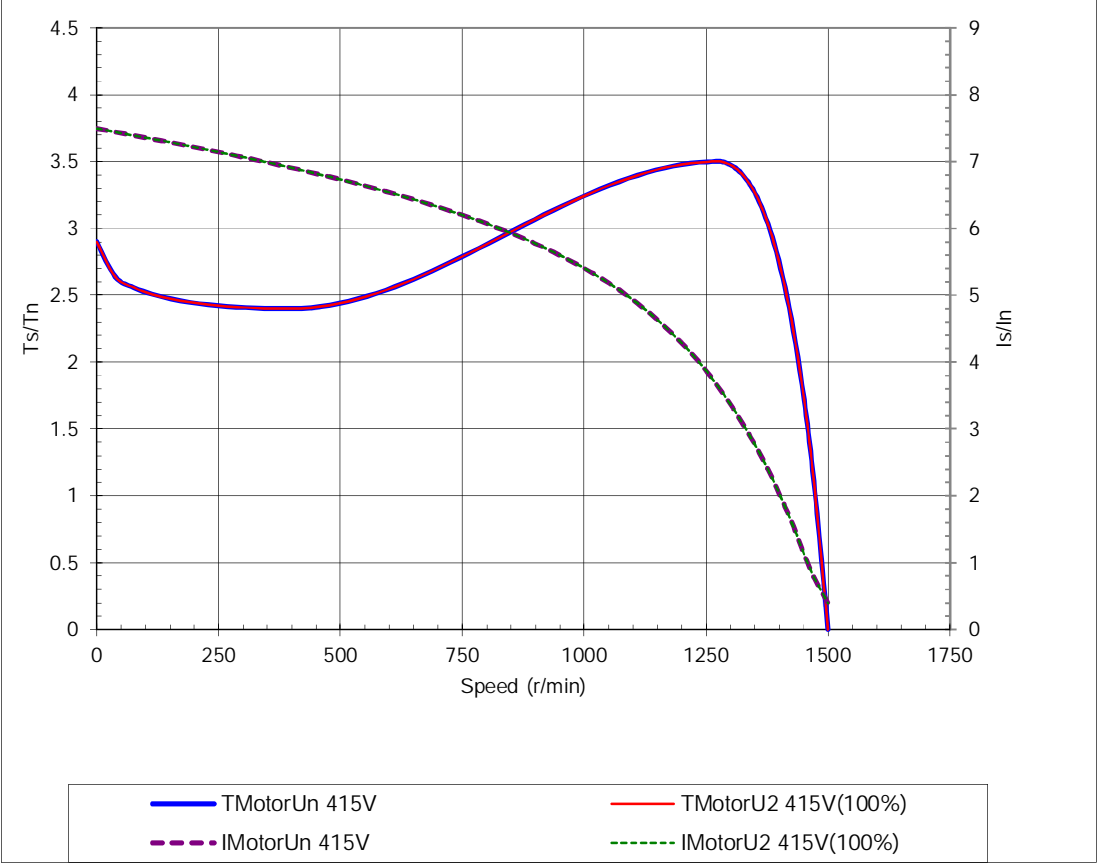

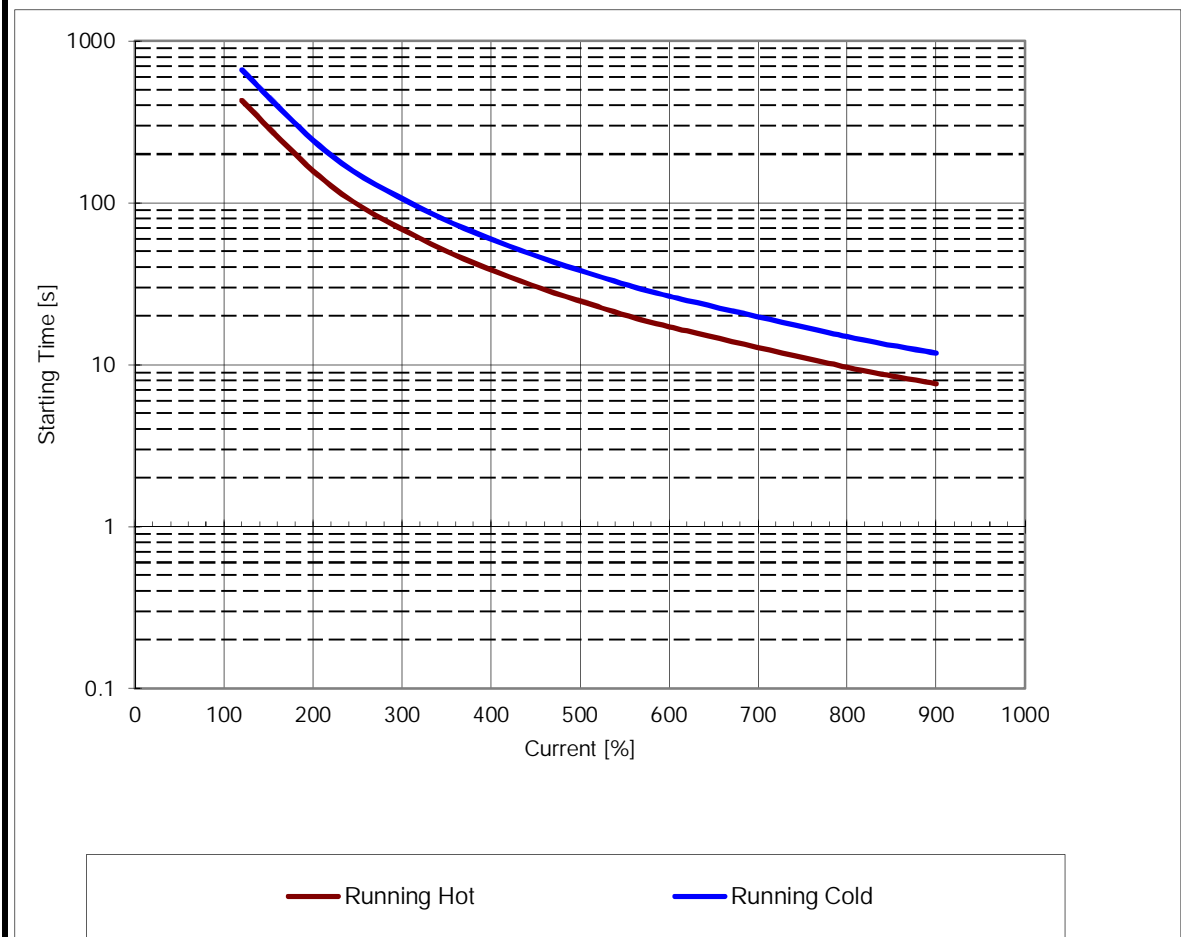
ABB Motors and Generators	Starting Curves			
	Project	Location		
Department/Author	Customer name	Customer ref.		Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/18/2019	Saving ident untitled.xls	Pages 3(3)
Type of product	TEFC, 3-phase, squirrel cage induction motor			
Type/Frame	M2BAX 180MLB 4	Calc. ref.	3GZH021018-17	
Product code	3GBA 182 420-HDDIN	Frequency (Hz)	50	
Rated output P _N	22 kW	Rated current I _N	41.5	A
Type of duty	S1 100%			
J _{motor} (kgm ²)	0.24	Voltage (V) 100%	415	Voltage (V) 415V(100%)
J _{load} (kgm ²)		T _{start} /T _N	2.9	T _{start} /T _N 2.9
Speed (r/min)	1475	Starting time (s)	0.1	Starting time (s)
T _N (Nm)	142	Speed (r/min)		Speed (r/min) 939
T _{load} (Nm)		I _s /I _N	7.5	I _s /I _N 7.5
		T _{max} /T _N	3.5	T _{max} /T _N 3.5
				
Data based on situation 9/18/2015				
All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004				

ABB Motors and Generators	Thermal Withstand Curve		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name 1.00001
Our ref.	Rev/Changed by A	Date of issue 1/18/2019	Saving ident untitled.xls
			Pages 5(3)

Type of product	TEFC, 3-phase, squirrel cage induction motor		
Type/Frame	M2BAX 180MLB 4	Calc. ref.	3GZH021018-17
Product code	3GBA 182 420-HDDIN	Frequency (Hz)	50
Rated output P _N	22 kW	Rated current I _N	41.5 A
Type of duty	S1 100%		

J _{motor} (kgm ²)	0.24	Voltage (V) 100%	415	Voltage (V)	415V(100%)
J _{load} (kgm ²)		T _{start} /T _N	2.9	T _{start} /T _N	2.9
Speed (r/min)	1475	Starting time (s)	0.1	Starting time (s)	
T _N (Nm)	142	Speed (r/min)		Speed (r/min)	939
T _{load} (Nm)		I _s /I _n	7.5	I _s /I _n	7.5
		T _{max} /T _n	3.5	T _{max} /T _n	3.5



Data based on situation 9/18/2015
 All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004